

Conector de compresion PPC 6 PLUS


Description

PPC EX6 PLUS Universal Compression Connectors for RG6 series cable are up to SCTE standards providing a secure watertight connection and excellent pull strength with effortless installation.

Installers are faced with the problem of identifying old unmarked 60% through Quad Shield Series 6 cable, and having to guess which connector is the best match. This results in unnecessary service calls due to the use of the wrong connector/cable match. The unique patented design of the EX® body achieves true universality on 60% through Quad Shield for PE, and PVC jackets for RG6 series cable.



Features:

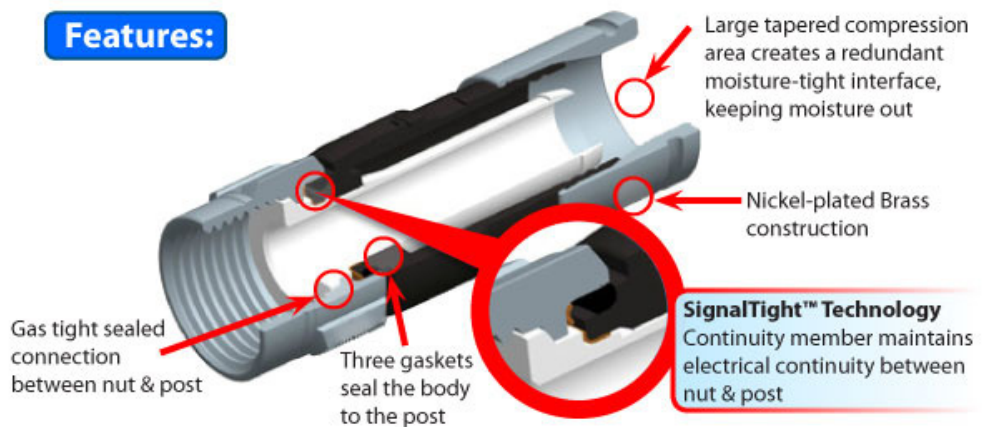

Specifications

- Bandwidth: 0 MHz to 3 GHz
- Impedance: 75 Ohms
- Return Loss: Minimum -30 dB to 3 GHz
- Insertion Loss: Less than .10 dB to 3 GHz
- Operating Voltage: 90 V (at 60 Hz continuous AC)
- Operating Temperature: -40°F to +140°F (-40°C to +60°C)
- Cable Retention: 45 lbs (20.41 kg) minimum
- Meets or exceeds all SCTE Specifications

