

CATV

56EYA 16*22+WDM Series 2U High Power Ytterbium Optical Amplifier

■ Performance Characteristics




- ◆ Adopts world top brand pump lasers and the OFS fiber of United States, advanced LG switch low-power circuit design, greatly reducing the overall power consumption and heat;
- ◆ Perfect APC, ACC, ATC control, users use in different networks, good ventilation design and temperature-controlled fan, ensure the long life and high reliability of PUMP laser;
- ◆ Using digital control chip, remote or local output power adjustable;
- ◆ Excellent protection circuit design, with light detection, optical return loss monitoring. Great protection of lasers and light path safety.
- ◆ Built-in low-noise preamplifier eliminates the need for cascaded EDFA, allowing input light to be as low as -5dBm, greatly reducing CNR and MER degradation.
- ◆ Demultiplexer for 1310/1490/1550nm EPON and GPON. It greatly facilitates network applications with PON. Low noise figure (type $\leq 4.5\text{dB}$, Max $\leq 5.0\text{dB}$);
- ◆ The total output optical power is optional: 2-10W (33-40dBm);
- ◆ The front panel can be removed and replaced flexibly according to the number of output ports;
- ◆ Can add a built-in optical switch module to facilitate the expansion of the device function;
- ◆ Cooling fan supports online replacement;
- ◆ The front panel LCD provides the operating parameters and alarms of the entire unit.
- ◆ RJ45 provides serial communication and SNMP network management interface;
- ◆ Carrier-grade dual power hot backup, CPU assignable power

■ Product Application

The FD-YE1622W series high power amplifier is a high power multi-output optical fiber amplifier with a gain spectrum bandwidth of 1535~1565nm. It is mainly designed for CATV or 1~8 continuous strip channels (ITU wavelength) applications. It provides a flexible, low-cost solution for large-scale FTTH coverage of CATV systems in large and medium-sized cities.

FD-YE1622W can achieve single-wavelength cable TV transmission, CWDM single-fiber three-wave, flat-gain type, DWDM; its reliable and excellent performance ratio between the main application of FTTH, FTTB, DBS, MMDS, FTTX pon, is to build CATV large Medium-sized optical fiber transmission network is an important equipment.

■ Principle Diagram

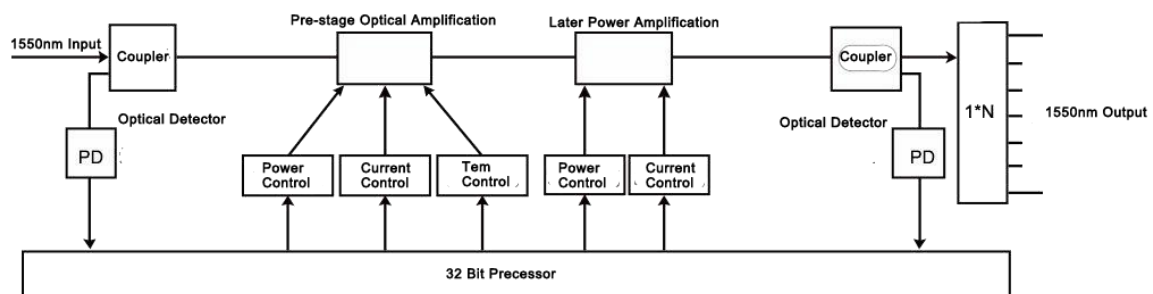

FD-YE1622W

■ Limited Parameters

Technical Data	FD-YE1622W
Max wavelength	1535-1565nm
Minimum input power	-10dBm
Max input power	+10dBm
Limited working temperature	-25°C ~ +70°C
Limited working voltage	AC90~265V&DC30~72V&DC30~72V

■ Technical Parameters

Technical Data		FD-YE1622W
Wavelength		1535-1565nm
Input power		-5dBm~+10dBm (normal +3dBm)
Output power		33dBm~40dBm (WDM -1dBm)
Output port		SC: 16/32/64 ; LC: 32/64/128
Each output power		10~23dBm or customized
Noise		< 5.0dB (Pin=0dB)
Polarization dependence loss (PDL)		< 0.3dB
Polarization dependence gain (PDG)		< 0.4dB
Polarization mode dispersion (PMD)		< 0.3dB
Pump leakage power		< -30dBm
Echo loss		≥ 55dB
Optical connector		SC/APC&SC/UPC&LC/APC&LC/UPC
Supply voltage		220V(AC90V~265V)&110V(AC90V-130V)&48V(DC30~72V)
Consumption		≤100w
Working temperature		-5°C ~+42°C
Storage temperature		-40°C ~+80°C
Working relative humidity		5~95%
Product net size		450(L)*482(W)*89(H)
Package dimension		640(L)*640(W)*200(H)