


LUMICORE FLEXBRIGHT

Messengered Flat Drop Fiber for your FTTX Networks

FlexBright incorporates a compact and lightweight drop fiber utilizing premium materials together with the most flexible fiber to date, the G.657.B3. The messengered self-supporting fiber optic design is the ideal choice for all long runs for any FTTX network construction.

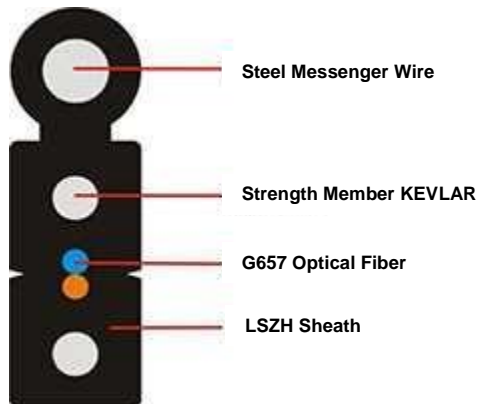

Suitable for self-supporting aerial and duct FTTX Drop Installations.
Able to transmit all wave lengths.



SPECIFICATIONS – Messengered
Fiber Count: 1,2,4,8 and 12
Glass Manufacturer: LG - G.657.B3
Strength Member: FRP Kevlar
Sheath Material: LSZH
Cable Dimensions: 5.2,2.0
Cable Weight: 21 lb./kft [32kg/km]
Minimum Bend Radius with load: 12cm
Minimum Bend Radius with no load: 10cm
Short Term Crush: 2200N
Temperature: Installation -20c to +60c
EU RoHS COMPLIANT
Cable Diameter: 2mm

